

Hello,

We are very pleased to present the following machine for your review and approval:

2000 Okuma CROWN L1060

CNC Turning Center

Max Swing Over Bed: 21.65"
Max Swing Over Cross Slide: 15.75"
Chuck Size: 10"
Max Distance Between Centers: 20"
Max Turning Diameter: 10.63"
Max Turning Length: 19.68"
X-Axis (Cross Travel): 7.28"
Z-Axis (Longitudinal Travel): 20.47"
X-Axis Feed Rates: .1 - 400 IPM
X-Axis Rapid Traverse Rate: 590 IPM
Z-Axis Feed Rates: .1-400 IPM
Z-Axis Rapid Traverse Rate: 787 IPM
Number of Tool Turrets: 1
Tool Turret Positions: 12 Total
Spindle Nose: A2-8
Spindle Bore: 3.15"
Bar Capacity: 3"
Spindle Speed Range: 65 - 3,500 RPM
Spindle Horsepower: 20 HP
Approximate Machine Dimensions: 104" x 74"
Approximate Machine Height: 72"
Approximate Machine Weight: 10,000 LBS

-EQUIPPED WITH-

Okuma OSP-U10L CNC Control
Mac Man
Inch/Metric Switchable
10" Shunk 3-Jaw Hydraulic Chuck
3" Bar Capacity
12 Position ID/OD Tool Turret
Bed Mounted Tailstock
Heavy Duty Slant Bed Construction
Auto Lubrication System
Chip Conveyor & Coolant System




PRICE.....\$8,500

Best Regards,

Mike Heim - Sales Manager



Two Spade Machinery LLC
Office: (860) 356-4439
Mobile: (207) 205-4761
Email: mike@2spade.com

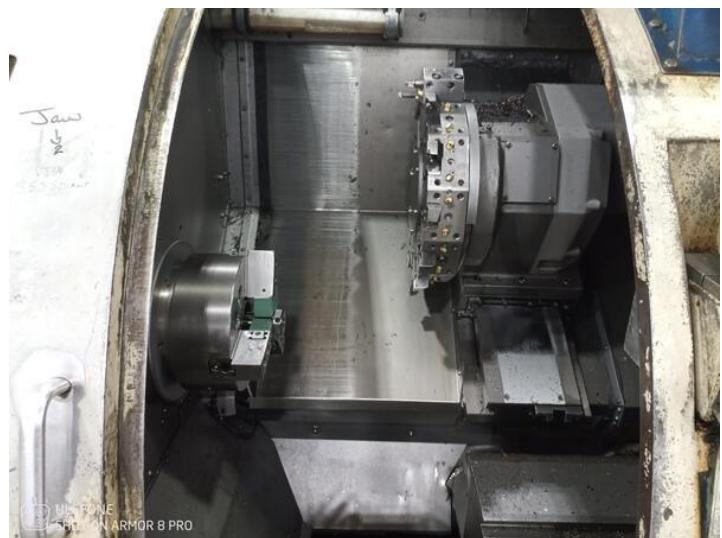

The Torit filter cartridges provided with this collector provide the longest possible filter life. The filters should be replaced after a noticeable reduction in airflow or increased pressure drop.

PARTS AND SERVICE
1-800-365-1331

Request part number
Last replaced

Donaldson.
TORIT. PRODUCTS

PARTNERS
in GRIME



ULEFONE
SHOT ON ARMOR 8 PRO



MACHINE TYPE

SUPPLY VOLTAGE

7525183

220/480 V

PHASE

3 ph

FREQUENCY

60 Hz

RATED CAPACITY

23.1 kVA

FULL LOAD CURRENT

60.7/27.8 A

LARGEST MOTOR
CURRENT RATING

65 A

INTERRUPT CAPACITY

25/8 kA

DRAWING NO.

ATO002

SERIAL NO.

1753

OKUMA AMERICA CORPORATION
CHARLOTTE, NC
USA

ES410-ZZZ-019

ULEFONE
SHOT ON ARMOR 8 PRO

