Hello,

We are very pleased to present the following machine for your review and approval:

2010 HAAS OM-2A

High Speed Compact VMC



Table size- 10" x 20"
X axis travel- 12"
Y axis travel- 10"
Z axis travel- 12"
Table capacity- 250 Lbs.
Spindle taper- ISO 20
Spindle speeds- 30,000 R.P.M.
Tool changer- 20 tool
Machine weight- 3000 Lbs.
Machine dimensions- 60" x 50" x 80" H

-EQUIPPED WITH-

HAAS CNC Control with USB
Haas Control options- Rigid tapping,
Rotation & Scaling, DNC, Macros,
Quick code, Pre-Orient Tap,
High Speed Machining,
prewired for 4th axis,
Advanced Tool Management,
Extended memory
Machine hours- Servo time 56,697,
Motion time 2,116, Spindle time 2,077
SpiderCool Programmable coolant nozzle
Coolant tank & Pump
Machine manual
Machine is wired for 220 single phase

*****Machine came out of a Medical Part MFG*****

PRICE.....$39,900

Best Regards,

Mike Heim - Sales Manager

Two Spade Machinery LLC
Mobile: (207) 300-3649
Email: mike@2spade.com


SpiderCool


NOTICE
NOTICE



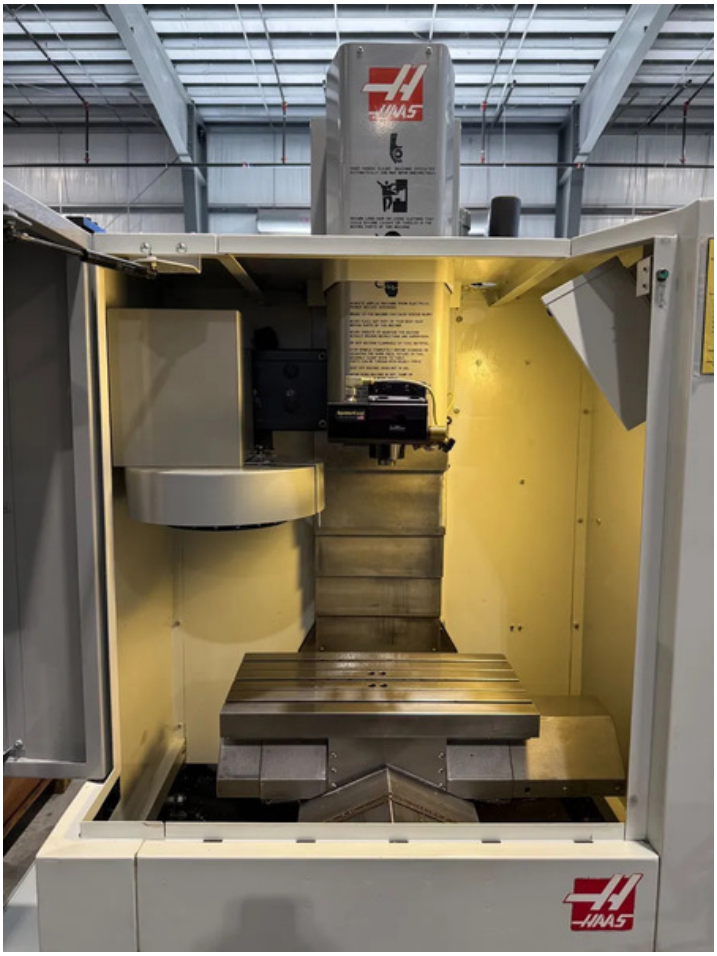

CAUTION
WARNING!
HIGH
VOLTAGES
HAAS







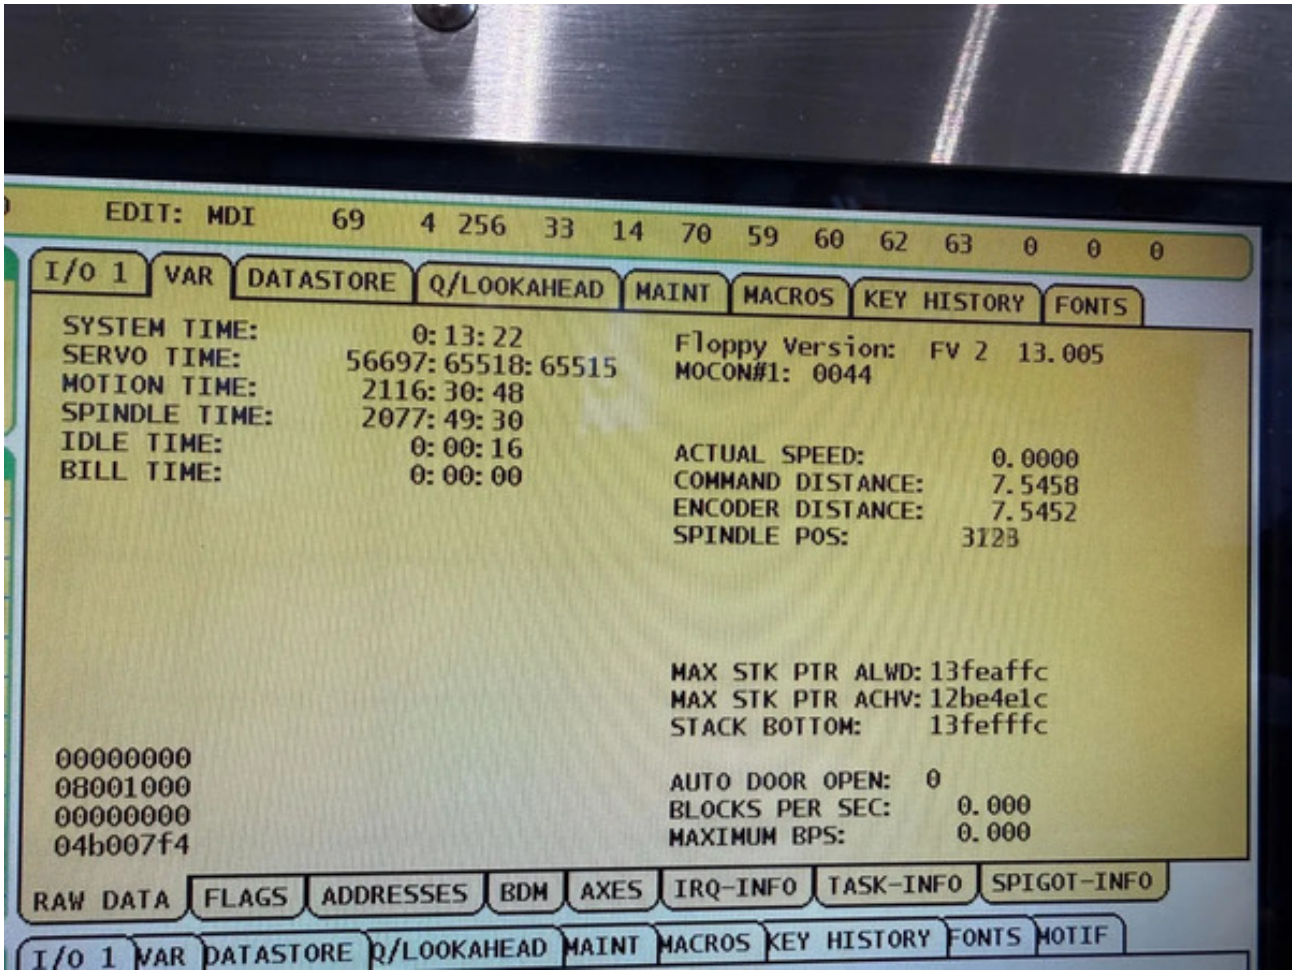











EDIT: MDI 69 4 256 33 14 70 59 60 62 63 0 0 0
I/O 1 VAR DATASTORE Q/LOOKAHEAD MAINT MACROS KEY HISTORY FONTS
SYSTEM TIME: 0:13:22
SERVO TIME: 56697:65518:65515
MOTION TIME: 2116:30:48
SPINDLE TIME: 2077:49:30
IDLE TIME: 0:00:16
BILL TIME: 0:00:00
Floppy Version: FV 2 13.005
MOCON#1: 0044
ACTUAL SPEED: 0.0000
COMMAND DISTANCE: 7.5458
ENCODER DISTANCE: 7.5452
SPINDLE POS: 3128
MAX STK PTR ALWD: 13feaffc
MAX STK PTR ACHV: 12be4e1c
STACK BOTTOM: 13fefffc
00000000
08001000
00000000
04b007f4
AUTO DOOR OPEN: 0
BLOCKS PER SEC: 0.000
MAXIMUM BPS: 0.000
RAW DATA FLAGS ADDRESSES BDM AXES IRQ-INFO TASK-INFO SPIGOT-INFO
I/O 1 VAR DATASTORE Q/LOOKAHEAD MAINT MACROS KEY HISTORY FONTS MOTIF


HAAS
MODEL
OM-2A
HAAS AUTOMATION, INC, OXNARD, CA. 93030
SERIAL NUMBER 1077899
DATE OF MFG 4/10
VOLTAGE 195-260
PHASE .....
HERTZ 50/60
FULL LOAD ..... 20 AMPS
LARGEST LOAD..... 8 AMPS
SHORT CIRCUIT INTERRUPTING CAPACITY - 10,000 AMPS
WIRING DIAGRAM 96 0284
SHORT CIRCUIT CURRENT 5,000 Amps RMS SYMMETRICAL
ARC FLASH RATING: 208-240VAC MODELS HRC-1,
360-480VAC MODELS HRC-2
NEMA TYPE 1 ENCLOSURE-FOR INDOOR USE ONLY.
OVER CURRENT PROTECTION PROVIDED
AT MACHINE SUPPLY TERMINALS.
MADE IN U.S.A.
P/N 29-10049