Hello,

We are very pleased to present the following machine for your review and approval:

2012 Haas VF-2YT

Vertical Machining Center



Travels: 30 in X-axis, 20 in Y-axis, 20 in Z-axis
Table size: 36 in x 18 in
Table capacity: 3,000 lb evenly distributed
Spindle speed: 8,100 RPM
Spindle power: 30 HP
Spindle taper: CT or BT 40
Tool changer: 20-tool carousel
Rapids: 1,000 IPM X/Y/Z
Coolant capacity: 55 gal
Electrical: 3 phase, 195-260V
Haas standard low-voltage spec 220 VAC
70A full load
Approx. shipping weight: 7,800 lb standard configuration

-EQUIPPED WITH-

Haas CNC control
20-pocket carousel automatic tool changer
36 in x 18 in table
40-taper spindle
8,100 RPM spindle
3-phase electrical service, 195-260V
55-gallon coolant tank standard model feature
Rigid tapping standard model feature

PRICE.....$39,900

Best Regards,

Mike Heim - Sales Manager

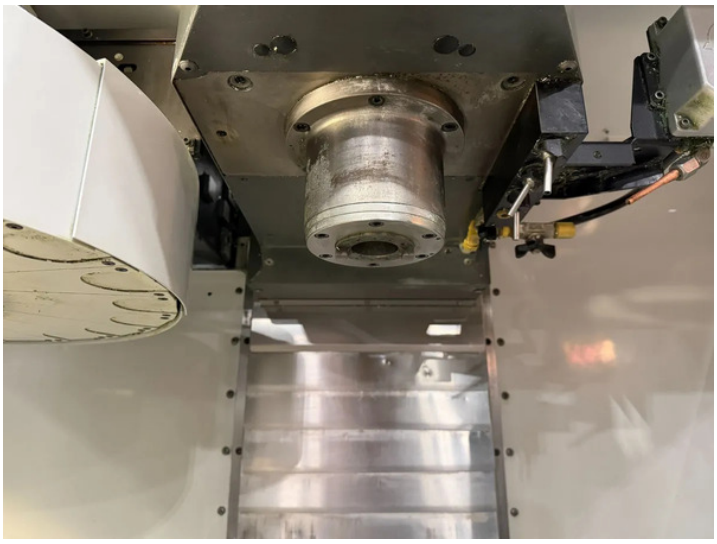
Two Spade Machinery LLC
Mobile: (207) 300-3649
Email: mike@2spade.com







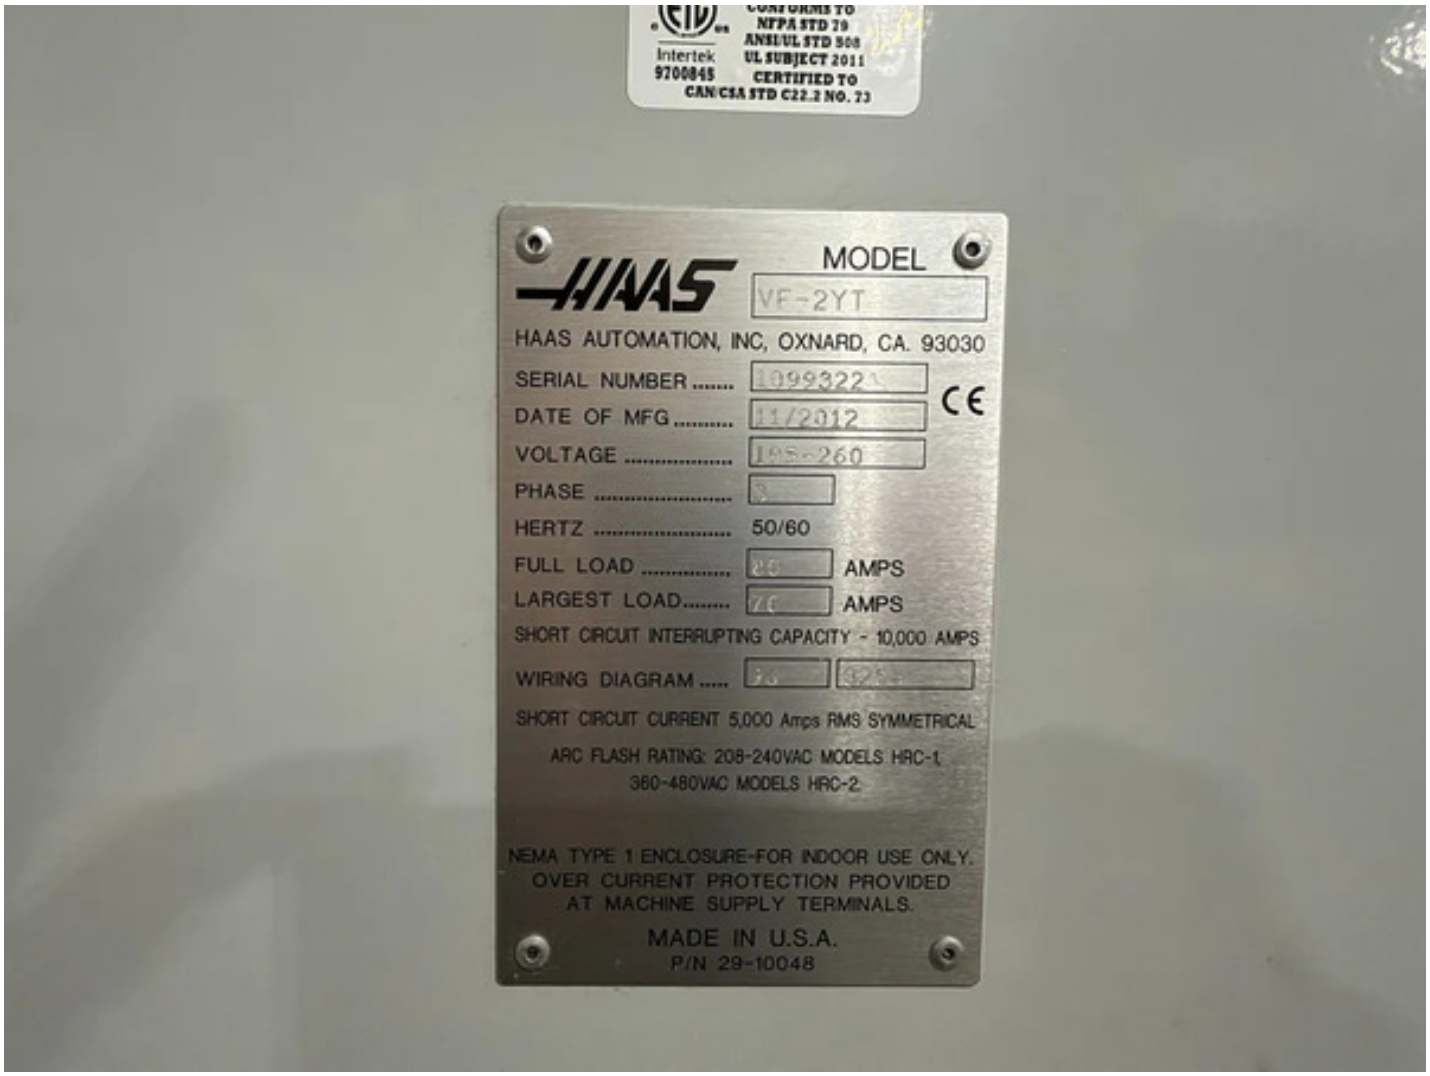

DANGER
HIGH VOLTAGE
DANGER




VF 2YT






NFPA STD 79
ANSI/UL STD 508
UL SUBJECT 2011
CERTIFIED TO
CAN/CSA STD C22.2 NO. 73
Intertek
9700845
HAAS
MODEL
VF-2YT
HAAS AUTOMATION, INC, OXNARD, CA. 93030
SERIAL NUMBER .....
DATE OF MFG .....
VOLTAGE .....
PHASE .....
HERTZ 50/60
FULL LOAD ..... AMPS
LARGEST LOAD..... AMPS
SHORT CIRCUIT INTERRUPTING CAPACITY - 10,000 AMPS
WIRING DIAGRAM .....
SHORT CIRCUIT CURRENT 5,000 Amps RMS SYMMETRICAL
ARC FLASH RATING: 208-240VAC MODELS HRC-1
360-480VAC MODELS HRC-2
NEMA TYPE 1 ENCLOSURE-FOR INDOOR USE ONLY.
OVER CURRENT PROTECTION PROVIDED
AT MACHINE SUPPLY TERMINALS.
MADE IN U.S.A.
P/N 29-10048