

Hello,

We are very pleased to present the following machine for your review and approval:

2022 EUROTECH B620-SLY

Multi Axis CNC Lathe

Chuck Size: 10"

Bar Capacity: 3.15"

Spindle Motor: 30 hp

Spindle Speed: 5,000 RPM

Tailstock: No

Live Tooling: Yes

Sub Spindle: Yes

Y-Axis: Yes

Control: CNC (FANUC)

Weight: 14,900 lbs

-EQUIPPED WITH-

15 Station Turret

Y Axis

Live Tooling

High Pressure Coolant

Fanuc Control

Synchronous Sub Spindle

Chip Conveyor

(5) Live Toolholders

Gantry Part Conveyor




PRICE.....\$184,900

Best Regards,

Mike Heim - Sales Manager



Two Spade Machinery LLC
Mobile: (207) 300-3649
Email: mike@2spade.com

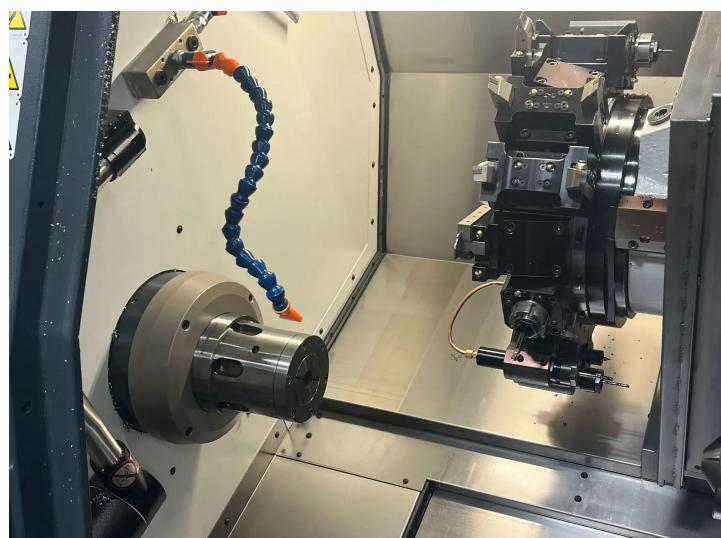

TECHNICAL DATA		B620-SL	B620-LY	B620-SLY
GENERAL				
Bar capacity (in)	2.0	2.75	3.15	
Distance between centre of spindles (in)	24.0	24.0	24.0	
Maximum speed (rpm)	5000	4500	3000	
Spindle nose	ASA 5'A2	ASA 6'A2	ASA 6'A2	
Spindle bore (in)	2.34	3.05	3.05	
Chuck diameter (in)	6	8	10	
Spindle power (HP) [S2 30min/S1]	23 / 34	40 / 54	25 / 30	
Turning torque (lb/ft.) [S2 30min/S1]	118	211	240	
Maximum speed (rpm)	5000	5000	5000	
Spindle nose	ASA 5'A2	ASA 5'A2	ASA 5'A2	
Maximum bar diameter	2.34	2.34	2.34	
Chuck diameter	5.51 / 6.50	5.51 / 6.50	5.51 / 6.50	
Spindle power (kW) [S2 30min/S1]	23 - 34	23 - 34	23 - 34	
Turning torque (lb/ft.) [S2 30min/S1]	80 / 118	80 / 118	80 / 118	
Number of positions	15	15	15	
Number of index positions	30	30	30	
Maximum tuning speed (rpm)	6000	6000	6000	
Maximum power (HP)	15 / 18	15 / 18	15 / 18	
Maximum torque (lb/ft.)	20 / 28	20 / 28	20 / 28	
Total weight (lb)	14,330 (*)	14,651 (*)	14,900 (*)	

Approximate weights.

Due to constant development of our products all specifications given here are subject to change without notice.

ULTIMA SERIES

B620-SLY MODEL



AUTOMATIC TAILSTOCK

SYNCHRONOUS SPINDLES

INTEGRAL MAIN & SUB-SPINDLE THERMALLY STABLE

AHS

